

TVR11

H.264 Digital Video Recorder



OVERVIEW

The TruVision™ DVR 11 (TVR 11) is a cost-effective, digital video recorder with 4-, or 8-channel capabilities. It utilizes H.264 video compression technology to deliver real-time recording per channel at a CIF resolution.

A built-in Web browser and access via mobile apps allow you to stay connected remotely via any Web-enabled device. Login via smart phone or tablet to configure, view, search, archive and monitor facilities, people or valuables. Compatible with TruVision Navigator, the DVR 11 integrates easily with existing systems and features a familiar, user-friendly interface. Start-up Wizards make installation and DDNS setup quick and simple.

Internal storage up to 2TB is available. In addition, video can also be archived via USB memory sticks. For user friendly, remote management and reliable recording, the DVR 11 represents a comprehensive solution to fit your needs and budget.

STANDARD FEATURES

- H.264 compression technology
- 4-, or 8-channel real-time recording at CIF resolution
- Mobile apps allow you to connect remotely via smart phone or tablet to keep an eye on facilities, people or valuables
- Start-up Wizards for quick and easy installation, search and playback
- PTZ and dome camera control via mouse, front panel joystick and IR remote controller
- E-mail notification upon alarm with attached images
- Triple monitor support - Monitor A, Monitor B and Spot Monitor
- Fully compatible with TruVision Navigator software
- Integrates easily with existing systems
- Familiar, user-friendly interface
- Features up to 2TB internal storage
- Time lapse, event and alarm recording settings

TVR11

Interlogix
National Sales Enquiries
1300 361 479


271-273 Wellington Road
Mulgrave Vic 3170
T +61 3 9239 1200
F +61 3 9239 1298

H.264 Digital Video Recorder

Specifications

	TVR-1104	TVR-1108
Video/Audio input		
Video compression	H.264	H.264
Analogue video inputs	4-ch	8-ch
Audio input	4-ch, RCA	8-ch, RCA
2 way audio	1-ch RCA	1-ch RCA
Video/Audio output		
HDMI output	1920 × 1080P / 60 Hz, 1920 × 1080P / 50 Hz, 1600 × 1200 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
VGA output	1920 × 1080P / 60 Hz, 1600 × 1200 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
CVBS output	Resolution: PAL: 704 × 576	
Video spot output	Resolution: PAL: 704 × 576	
Video loop out	N/A	8-ch
Encoding resolution	4CIF / 2CIF / CIF / QCIF	
Frame rate	25 fps	25 fps
Video bit rate	32kbps ~ 3072kbps or user defined (max 3072 kbps)	
Audio output	1-ch, RCA	1-ch, RCA
Audio bit rate	16 Kbps	16 Kbps
Dual stream	Support Sub-stream at CIF/QCIF: 25 fps (P)	
Stream type	Video, video and audio	
Playback resolution	4CIF / 2CIF / CIF / QCIF	
Synchronous playback	4-ch	8-ch
Storage		
SATA	1 interfaces	2 interfaces
e-SATA	1-eSATA	1-eSATA
Capacity	Up to 1TB for each disk	Up to 1TB for each disk
External interfaces		
Network interface	1 RJ45 10M / 100M / 1000M Ethernet interface	
Serial interface	1 RS-232 interface (for Probridge, Challenger, Technical Support) 1 RS-485 interface (for PTZ control) or KTD405 keyboard control	
USB interface	2, USB2.0	
Alarm in	4	4
Alarm out	1	1
General		
Power supply	100 ~ 240 VAC, 6.3 A, 50 ~ 60 Hz	
Consumption w/o hard drive	15 W	20 W
Working temperature	10 ~ +55° C	
Working humidity	10% ~ 90 %	
Dimensions (W x D x H)	315 x 222 x 44.5 mm	362 x 330 x 78 mm
Weight	Less than 8kg without hard drive	

Dimensional Diagram

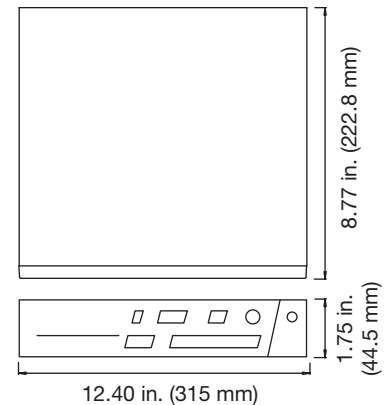

Ordering Information

TVR-1104C-1T	TruVision DVR 11, 4 CH, 1TB real time CIF, remote software, bi-directional audio
TVR-1108-2T	TruVision DVR 11, 8 CH, 2TB real time CIF, remote software, bi-directional audio

Specifications subject to change without notice.

© 2013 Interlogix.
All rights reserved.
Interlogix is part of UTC Climate, Controls & Security,
a unit of United Technologies Corporation.

TRUVISION_ENCODERS-DS-130211-1



interlogix.com.au