


NVR 21P

8/16/32 IP Channel Network Video Recorder

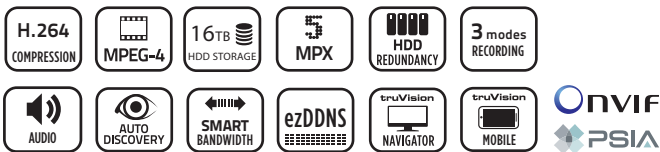

Overview

The TruVision® NVR 21 (TVN 21) is a high-performance network video recorder designed to support video streams from IP video cameras. With a total of 40/80/160 Mbps of total bandwidth available, the TVN 21 can support up to 16 cameras at HD resolution in real-time (25/30fps) and many other configurations.* Flexible bandwidth allocation per channel allows users to maximize recording performance. In addition to browser, software and mobile device management tools, the TVN 21's familiar front panel controls allow for easy operation.

IP camera support includes resolutions ranging from standard VGA to 5.0 megapixel, including Interlogix and third-party IP camera manufacturers.** The TVN 21 also supports TruVision encoders for integrating existing analogue cameras. Up to four internal hard disk drives may be configured for a total internal hard drive capacity of 2TB-16TB, making the TVN 21 ideal for extended storage or megapixel camera applications.

Recording options include continuous, motion, and alarm or combined scheduled recording modes. Motion recording utilizes an IP camera's built-in motion detection events, and alarms can be triggered from any of the 16 on-board alarm inputs or from alarm inputs that reside on the IP camera.

Software connectivity allows remote access to the recorder's full capabilities via Web browser or TruVision Navigator. TruVision TVRMobile also allows for remote device access. Configuration is quick and easy through startup wizards, IP device auto-discovery tools and ezDDNS service.

*Reference table on page 2.

**Support from third-party IP cameras may vary.

Standard Features

Camera Support

- Up to 8/16/32 cameras (OnVIF/PSIA) in real time (25fps)
- TruVision and UltraView IP cameras from VGA through 5.0 megapixel (indoor and outdoor)
- H.264 Axis, Arecont, ACTi, Panasonic, Samsung, Sony and Vivotek (VGA/Megapixel)
- TruVision 4-, 8- and 16-channel encoders
- PTZ and dome camera control via mouse, front panel joystick and IR remote control

Recording Capabilities

- Continuous, motion or scheduled recording modes
- Event recording based upon native IP camera activity detection or via unit alarm input
- Video is stored in the native IP camera format
- Audio recording with capable IP cameras
- Redundant camera recording or independent storage groups for different durations
- Reverse playback
- Digital zoom on live and recorded video
- Text insertion via ProBridge for ATM/POS
- Watermarking for legal video authentication
- 40/80/160 Mbps for incoming streams
- Flexible bandwidth selection

Hardware

- Compact rack mountable – 2RU
- Up to 8TB of plug-and-play internal, front accessible hard disk storage
- Support for external hard drive (eSATA)
- 16 on-board alarm inputs and 4 configurable alarm outputs
- Local USB archiving
- Composite, VGA and HDMI output for high-quality local viewing

NVR 21P

8/16/32 IP Channel Network Video Recorder

Interlogix
National Sales Enquiries
1300 361 479

271-273 Wellington Road
Mulgrave Vic 3170
T +61 3 9239 1200
F +61 3 9239 1298


Specifications

Model	TVN-2108	TVN-2116	TVN-2132
Video/ Audio Input	IP Video Input	8-ch	16-ch
	Bi-directional Audio	1-ch, RCA (2.0 Vp-p, 1kΩ)	
	Maximum bandwidth per channel	16 Mbps	
	Average bandwidth per channel	5 Mbps	
Video/ Audio Output	Recording Resolution	5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC)	
	HDMI Output	1-ch, resolution: 1920 × 1080P /60Hz, 1920×1080P /50Hz, 1600 × 1200/60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	VGA Output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	Audio Output	2-ch, RCA (Linear, 600Ω)	
	Playback Resolution	5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	Synchronous Playback	8-ch	16-ch
Hard Disk	SATA	8 SATA interfaces	
	eSATA	1 eSATA interface	
	Capacity	2TB capacity for each HDD	
External Interface	Network Interface	2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces	
	Serial Interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (reserved)	
	USB Interface	3 × USB 2.0	
	Alarm Interface	16 Alarm In, 4 Alarm Out	
General	Power Supply	100 ~ 240 VAC, 6.3 A, 50 ~ 60 Hz	
	Consumption (without hard disk or DVD-R/W)	≤ 45 W	
	Working Temperature	-10° C ~ +55° C	
	Working Humidity	10% ~ 90%	
	Chassis	19-inch rack-mounted 2U chassis	
	Dimensions (W x D x H)	445 x 470 x 90mm	
	Weight (without hard disk or DVD-R/W)	≤ 8 Kg (17.64 lb)	

Ordering Information

TVN-2108P-2T	TruVision NVR 21, 8 channels, 2TB Storage
TVN-2108P-4T	TruVision NVR 21, 8 channels, 4TB Storage
TVN-2108P-8T	TruVision NVR 21, 8 channels, 8TB Storage
TVN-2116P-2T	TruVision NVR 21, 16 channels, 2TB Storage
TVN-2116P-4T	TruVision NVR 21, 16 channels, 4TB Storage
TVN-2116P-8T	TruVision NVR 21, 16 channels, 8TB Storage
TVN-2116P-12T	TruVision NVR 21, 2U,16 channels, 12TB Storage
TVN-2116P-16T	TruVision NVR 21, 2U,16 channels, 16TB Storage
TVN-2132P-4T	TruVision NVR 21, 2U,32 channels, 4TB Storage
TVN-2132P-8T	TruVision NVR 21, 2U,32 channels, 8TB Storage
TVN-2132P-12T	TruVision NVR 21, 2U,32 channels, 12TB Storage
TVN-2132P-16T	TruVision NVR 21, 2U,32 channels, 16TB Storage

Dimensional Diagram

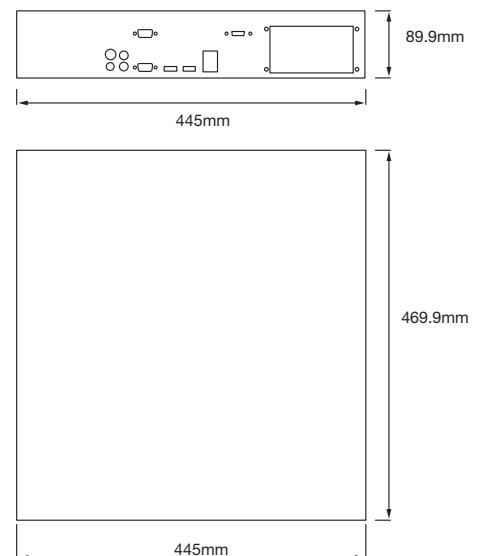

Specifications subject to change without notice.

Copyright © 2014 UTC Fire & Security Australia Pty Ltd.
All rights reserved.

UTC Fire & Security Australia Pty Ltd trading as Interlogix is a UTC Building and Industrial Systems company.

TRU-NVR21-DS-170314-1

