


NVR 21S

8/16 Channel PoE
Network Video Recorder

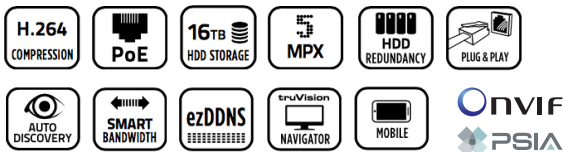

Overview

The TruVision® NVR 21S (TVN 21S) is a high-performance network video recorder with up to 16 built-in PoE ports designed to support video streams from IP video cameras. With a total of 40/80 Mbps of total bandwidth available, the NVR 21S can support up to 16 cameras at HD resolution in real-time (25fps) and many other configurations.* Flexible bandwidth allocation per channel allows users to maximize recording performance. In addition to browser, software and mobile device management tools, the familiar front panel controls allow for easy operation. On-board PoE ports support up to 120/200 watts for ease of installation.

IP camera support includes resolutions ranging from standard VGA to 6.0 megapixel, including Interlogix and third-party IP camera manufacturers.** The NVR 21S also supports TruVision encoders for integrating existing analog cameras. Up to four internal hard disk drives may be configured for a total internal hard drive capacity of 2TB-16TB, making the NVR 21S ideal for extended storage or megapixel camera applications.

Recording options include continuous, motion, and alarm or combined scheduled recording modes. Motion recording utilizes an IP camera's built-in motion detection events, and alarms can be triggered from any of the 16 on-board alarm inputs or from alarm inputs that reside on the IP camera.

Software connectivity allows remote access to the recorder's full capabilities via Web browser or TruVision Navigator. TruVision TVRMobile also allows for remote device access via smartphone or tablet. Configuration is quick and easy through startup wizards, IP device auto-discovery tools and ezDDNS service.

*Reference table on page 2.

**Support from third-party IP cameras may vary.

Standard Features

Camera Support

- Up to 8/16 HD cameras (ONVIF/PSIA) in real time (25fps)
- TruVision and UltraView IP cameras from VGA through 5.0 megapixel (indoor and outdoor)
- TruVision 4, 8 and 16-channel encoders
- PTZ and dome camera control via mouse, front panel, IR remote control or optional keypad

Recording Capabilities

- Continuous, motion or scheduled recording modes
- Event recording based upon native IP camera activity detection or via unit alarm input
- Audio recording with capable IP cameras
- Redundant camera recording or independent storage groups for different durations
- Reverse playback
- Digital zoom on live and recorded video
- Watermarking for legal video authentication
- ezDDNS
- Mobile apps
- Start up Wizards for quick and easy installation
- 40/80 Mbps for incoming streams
- Up to 16TB of storage

Hardware

- Up to 16-ports embedded PoE Switch
- Rack mountable – 1.5 RU
- Up to 16TB of plug-and-play internal, front accessible hard disk storage
- Support for external hard drive (eSATA)
- 16 on-board alarm inputs and 4 configurable alarm outputs
- Local USB archiving
- Composite, VGA and HDMI output for high-quality local viewing

Specifications

Model		TVN-2108S	TVN-2116S
Video/ Audio Input	IP Video Input	8-channel	16-channel
	Bi-directional Audio	1-channel, RCA (2.0 Vp-p, 1kΩ)	
	Total Bandwidth	40Mbps	80Mbps
Video/ Audio Output	Recording Resolution	6MP /5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	Analogue Output	1-channel, BNC (1.0 Vp-p, 75 Ω) resolution: 704 × 576 (PAL)	
	HDMI Output	1-channel, resolution: 1920 × 1080P /60Hz, 1920×1080P /50Hz, 1600 × 1200/60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	VGA Output	1-channel, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	Audio Output	2-channel, RCA (Linear, 600Ω)	
	Playback Resolution	6MP /5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	Synchronous Playback	8-channel	16-channel
Hard Disk	SATA	(4) SATA interfaces	
	eSATA	(1) eSATA interface	
	Capacity	4TB capacity for each HDD	
External Interface	Network Interface	(1) RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces	
	Serial Interface	(1) RS-232 interface (for parameters configuration, maintenance, transparent channel) (1) RS-485 interface (reserved)	
	USB Interface	(3) USB 2.0	
	Alarm In	16	
	Alarm Out	4	
Power over Ethernet	PoE Ports	8	16
	PoE Standard	802.3-af/at	
	Total PoE budget	120 watts	200 watts
	Maximum budget per port	30W	
General	Power Supply	100~240VAC, 6.3A, 50~60Hz	
	Consumption (without hard disk)	≤ 45 W	
	Working Temperature	-10° C ~+55° C	
	Working Humidity	10% ~ 90%	
	Chassis	1.5U	
	Dimensions (W x D x H)	442 × 371 × 74mm	
	Weight (without hard disk)	≤ 8 Kg (17.64 lb)	
Rack Mount	Included		

Typical Camera Capacity Configurations

TVN-2108S

Resolution	Frame Rate	Cameras	Recommended Days of Storage		
			4TB	8TB	16TB
4CIF (704 x 576)	12/15	8	48	96	192
4CIF (704 x 576)	25/30	8	24	48	96
HD (1280 x 720)	12/15	8	16	32	64
HD (1280 x720)	25/30	8	12	24	48
UXGA (1600 x1200)	12/15	8	12	24	48
UXGA (1600 x1200)	25/30	5	10	20	40
Full HD (1920 x1080)	12/15	8	12	24	48
Full HD (1920 x1080)	25/30	4	10	20	30
QXGA (2048 x1536)	12/15	5	10	20	30
QXGA (2048 x1536)	25/30	3	10	20	30
5 Mpx (2560 x1920)	8	5	9	18	36
5 Mpx (2560 x1920)	20	2	12	24	48

Note: This is an indication only; results depend on cameras used and environment.

TVN-2116S

Resolution	Frame Rate	Cameras	Recommended Days of Storage		
			4TB	8TB	16TB
4CIF (704 x 576)	12/15	16	24	48	96
4CIF (704 x 576)	25/30	16	12	24	48
HD (1280 x 720)	12/15	16	8	16	32
HD (1280 x720)	25/30	16	6	12	24
UXGA (1600 x1200)	12/15	16	6	12	24
UXGA (1600 x1200)	25/30	10	5	10	20
Full HD (1920 x1080)	12/15	16	6	12	24
Full HD (1920 x1080)	25/30	8	5	10	15
QXGA (2048 x1536)	12/15	10	5	10	15
QXGA (2048 x1536)	25/30	6	5	10	15
5 Mpx (2560 x1920)	8	10	5	9	18
5 Mpx (2560 x1920)	20	4	6	12	24

Note: This is an indication only; results depend on cameras used and environment.

NVR 21S

8/16 Channel PoE Network Video Recorder

Interlogix

National Sales Enquiries
1300 361 479

Ground Floor
10 Ferntree Place
Notting Hill, Victoria 3168
T: +61 3 239 1200
W: www.interlogix.com.au


Ordering Information

TVN-2108S-2T	TruVision® NVR 21S, 8-Channel, IP H.264 ONVIF/PSIA, 8-Port PoE Switch, 40Mbps Bandwidth, eSATA, 2TB Storage
TVN-2108S-4T	TruVision NVR 21S, 8-Channel, IP H.264 ONVIF/PSIA, 8-Port PoE Switch, 40Mbps Bandwidth, eSATA, 4TB Storage
TVN-2108S-8T	TruVision NVR 21S, 8-Channel, IP H.264 ONVIF/PSIA, 8-Port PoE Switch, 40Mbps Bandwidth, eSATA, 8TB Storage
TVN-2116S-2T	TruVision NVR 21S, 16-Channel, IP H.264 ONVIF/PSIA, 16-Port PoE Switch, 80Mbps Bandwidth, eSATA, 2TB Storage
TVN-2116S-4T	TruVision NVR 21S, 16-Channel, IP H.264 ONVIF/PSIA, 16-Port PoE Switch, 80Mbps Bandwidth, eSATA, 4TB Storage
TVN-2116S-8T	TruVision NVR 21S, 16-Channel, IP H.264 ONVIF/PSIA, 16-Port PoE Switch, 80Mbps Bandwidth, eSATA, 8TB Storage
TVN-2116S-16T	TruVision NVR 21S, 16-Channel, IP H.264 ONVIF/PSIA, 16-Port PoE Switch, 80Mbps Bandwidth, eSATA, 16TB Storage

Accessories

TVN-20XX-HDD-2T	TruVision NVR HDD Expansion Kit, 2TB Storage
TVN-HDD-4TB	TruVision NVR HDD Expansion Kit, 4TB Storage

Dimensional Diagram

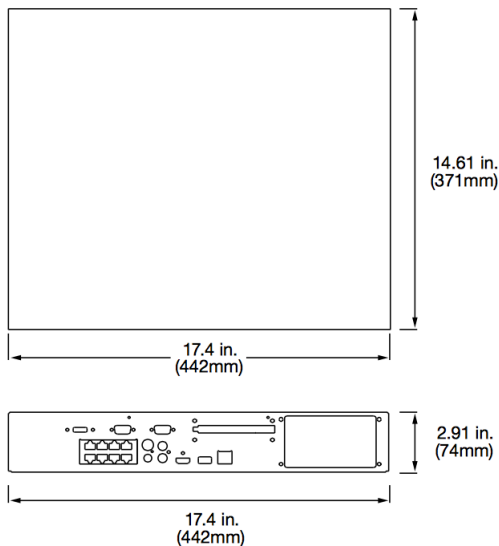

Specifications subject to change without notice.

Copyright © 2015 UTC Fire & Security Australia Pty Ltd.
All rights reserved.

UTC Fire & Security Australia Pty Ltd trading as Interlogix is a UTC Building & Industrial Systems company.



TRU-NVR21S-DS-150415-1