


# TS0073

## 2AMP Power Supply and Battery Box

### Overview

A linear power supply used to supply power to remote products at 13.8 Volts DC. Enclosed in a metal box with room for a 6.5AH battery & tamper features, the enclosure can be mounted directly over a standard twin GPO outlet.

The TS0073 comes with a 1 metre long, 3-pin, main cord & onboard battery charging facilities. Output current is regulated & an internal fuse protects the battery from excessive loads.

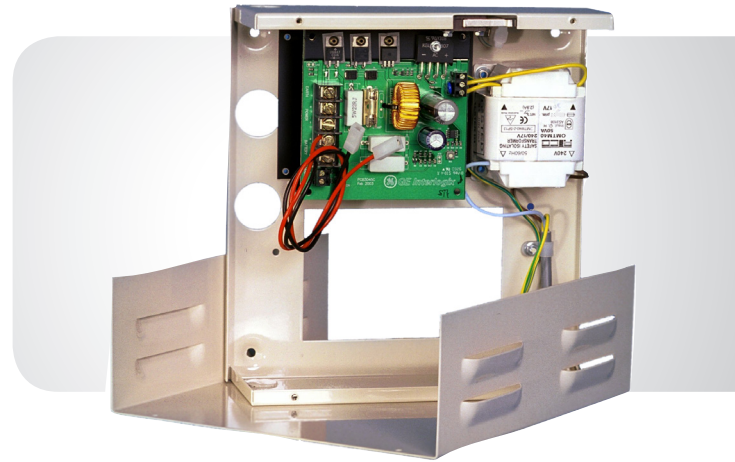

### Features

- Backup Battery
- Built-in tamper
- Wall mount enclosure
- Can be mounted directly over a GPO to protect power from being switched off

# TS0073

## 2AMP Power Supply and Battery Box

Interlogix  
National Sales Enquiries  
1300 361 479

Ground Floor  
10 Ferntree Place  
Notting Hill, Victoria 3168  
T: +61 3 239 1200  
W: www.interlogix.com.au

### Specifications

---

#### Mains Input

Input Voltage	240 Volts AC Mains
Input Current Standby	70mA AC @ 240 Volts
At Maximum O/P	230mA AC @ 240 Volts

#### Power Supply Outputs

O/P Voltage	13.8 Volts DC
O/P Current	2 Amps maximum
Battery Charge O/P	13.8 Volts DC
Battery Capacity	1 X 6.5 Amp Hr maximum

#### Monitoring Outputs

'Mains OK' O/P	Open Collector 'Mains OK' Output (Active Low when Mains present. 50mA max.)
'Mains OK' Indication	'Mains OK' LED on PCB

### Ordering information

---

TS0073	12V DC Power Supply & Battery Box
--------	-----------------------------------

---

Specifications subject to change without notice.

Copyright © 2015 UTC Fire & Security Australia Pty Ltd.  
All rights reserved.

UTC Fire & Security Australia Pty Ltd trading as Interlogix is a UTC Building & Industrial Systems company.



TS0073-DS-151105-4